



Air Tools

Pneumatic tools from KAESER
Your one-stop shop.

www.kaeser.com

The next generation of hammers




Ergonomic trigger lock




Male stud handle fitting



Wider grip aperture

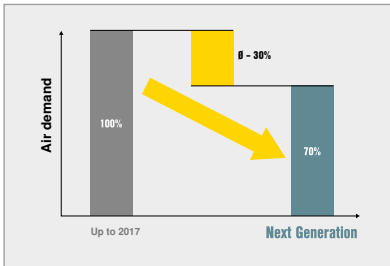

Low air consumption

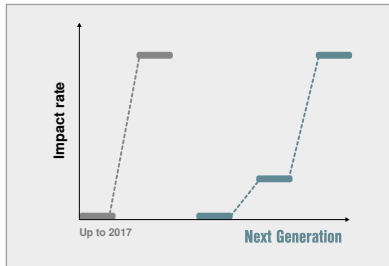

Staged start-up

Power through concrete and stone



- High-performance drilling and hammering
- Exceptional versatility – perfect for use in mining, construction, quarrying and industrial applications

- Simple, durable design
- Model BH16 and up available with power blower device for blowing out drill holes

Recommended accessory



Hose lubricator

Recommended accessory for compressors without a tool lubricator, or for compressors with an integrated tool lubricator where the distance to the tool is greater than 20 m, or if there is a difference in height between the compressor and the tool.

Air tools

| Model | Impact rate Strokes/min | Air consumption *) m ³ /min | Chuck - shank | Weight kg | Impact force Joules | Weighted sum acceleration value **) m/s ² | Power/weight ratio W/kg |
|-------|----------------------------|---|---------------|--------------|------------------------|---|----------------------------|
|-------|----------------------------|---|---------------|--------------|------------------------|---|----------------------------|

Breakers

With hand grip

| | | | | | | | | |
|--------------|------|-----|----------|----|-----|----|-----|------|
| H 60 | 2142 | 0.4 | S19x50 | a) | 6 | 12 | 5.5 | 71.5 |
| H 95 | 1596 | 0.6 | S22x82.5 | c | 9.6 | 34 | 7.4 | 94.1 |
| H 130 | 1452 | 0.6 | S22x82.5 | c | 12 | 40 | 6.6 | 80.5 |

With hand grip (vibration damped)

| | | | | | | | | |
|----------------|------|-----|----------|---|----|----|-----|------|
| H 110 V | 1596 | 0.8 | S22x82.5 | c | 11 | 34 | 5.2 | 82.1 |
|----------------|------|-----|----------|---|----|----|-----|------|

With T-grip (vibration damped)

| | | | | | | | | |
|-----------------|------|-----|----------|----|------|----|-----|------|
| AH 150 V | 1452 | 0.6 | S22x82.5 | d) | 17 | 40 | 6.3 | 57.2 |
| AH 180 V | 1070 | 0.6 | S25x108 | d) | 17.9 | 50 | 7.7 | 49.9 |
| AH 200 V | 1194 | 1.1 | S25x108 | d) | 20.8 | 50 | 6.5 | 47.8 |
| AH 240 V | 1356 | 1.1 | S28x152 | d) | 26.2 | 65 | 7.1 | 56.1 |
| AH 280 V | 1314 | 1.1 | S32x152 | d) | 28 | 77 | 6 | 60.3 |

*) at 6 bar, **) as per ISO28927-10

Hammer drills

With hand grip

| | | | | | | | | |
|-------------|------|-----|----------|----|-----|-----|------|------|
| BH 8 | 3660 | 0.5 | S19x82.5 | a) | 8.6 | 8.5 | 15.4 | 53.3 |
| BH 8 | 3660 | 0.5 | S22x82.5 | a) | 8.6 | 8.5 | 15.4 | 53.3 |

With T-grip

| | | | | | | | | |
|--------------|------|-----|---------|----|------|----|------|------|
| BH 16 | 2440 | 1.6 | S22x108 | e) | 18.9 | 30 | 19.0 | 47.2 |
| BH 21 | 2740 | 2.1 | S22x108 | e) | 24.4 | 40 | 17.7 | 59.6 |

With T-grip (vibration damped)

| | | | | | | | | |
|----------------|------|-----|---------|----|------|----|------|------|
| BH 16 V | 2440 | 1.6 | S22x108 | e) | 22.9 | 30 | 10.6 | 39.0 |
|----------------|------|-----|---------|----|------|----|------|------|

*) at 5 bar, **) as per ISO28927-10

a) Retaining cap, b) Retaining pin, c) Cross cap, d) Locking retaining cap, e) Retaining clip

Chisels

Matching chisels are available separately: Pointed chisel, flat chisel, scaling chisel, spade chisel

Drill bits

Matching drill bits are available separately: Monobloc bit, cone drill rod, core bit

Tool lubricator

| Model | Weight kg | Length mm | Oil capacity l | Max. working pressure bar |
|--------------|--------------|--------------|-------------------|------------------------------|
| SO 16 | 6 | 370 | 1.4 | 9 |



Image: H 95



Image: AH 180 V



Image: BH 16 V



Image: incl. optional stand

The world is our home

As one of the world's largest manufacturers of compressors, blowers and compressed air systems, KAESER KOMPRESSOREN is represented throughout the world by a comprehensive network of wholly owned subsidiaries and authorised distribution partners in over 140 countries.

By offering innovative, efficient and reliable products and services, KAESER KOMPRESSOREN's experienced consultants and engineers work in close partnership with customers to enhance their competitive edge and to develop progressive system concepts that continuously push the boundaries of performance and technology. Moreover, decades of knowledge and expertise from this industry-leading systems provider are made available to each and every customer via the KAESER group's advanced global IT network.

These advantages, coupled with KAESER's worldwide service organisation, ensure that every product operates at the peak of its performance at all times, providing optimal efficiency and maximum availability.



KAESER COMPRESSORS Australia Pty. Ltd.

Locked Bag 1406 – Dandenong South – Vic. 3164

45 Zenith Road – Dandenong – Vic. 3175

Phone: +61 39791 5999 – Fax: +61 39791 5733

www.kaeser.com – E-mail: info.australia@kaeser.com